

External 2 Pair Dropwire Telephone Cable

PACW/PE insulation/Support Strands/PE sheathed

External Dropwire Telephone Cable (Complies with BT Specification CW1411)



BRITISH CABLES COMPANY

Dropwire 10B

Application

This cable is designed for overhead distribution lines, typically from a telegraph pole to the customer's premises.

Product description

The cable contains two 0.5mm plain solid copper pairs insulated with solid polyethylene and wrapped with a polyester tape, three elements of 3 x 0.25mm brass coated steel support strands insulated with PVC, and is sheathed overall with a medium density black polyethylene sheath.

Construction

Conductor:

0.5mm Plain Annealed Copper Wire (PACW)

Insulation:

Solid High Density Polyethylene

Diameter over Insulation:

1.02mm

Colour code:

Pair 1: Orange/White

Pair 2: Green/Black

Core wrap:

Polyester Tape

Support strand:


Brass Plated Steel, 3 elements of 3 x 0.25mm strands, each element PVC

Ripcord:

Nylon

Identification:

Manufacturer's Thread to PD 2379

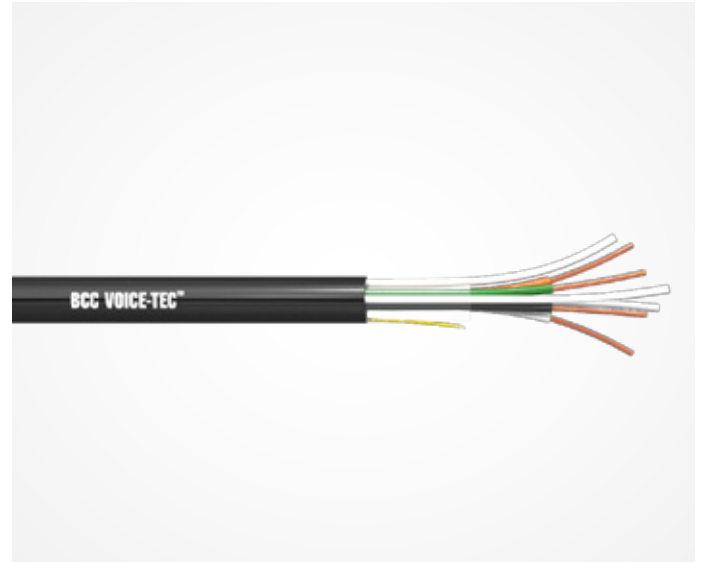

Jacket:

Black Medium Density Polyethylene

Minimum Thickness: 0.4mm

Minimum Diameter: 5.1mm

Target Diameter: 5.3mm

Maximum Diameter: 5.6mm

Electrical properties (20°C):

Maximum Conductor Resistance: 95 Ω /km

Maximum Mutual Capacitance: 56 nF/km

Maximum Capacitance Unbalance: 275 pF/500m

Minimum Insulation Resistance: 10,000 M Ω /km

Breaking load:

Minimum: 1350 Newtons

Maximum: 1550 Newtons



British Cables Company Limited, Delaunays Road, Blackley, Manchester, M9 8FP, United Kingdom

Tel: +44 (0) 161 741 2345 | Fax: +44 (0) 161 795 8393 | Web: www.britishcablescompany.com | Email: info@britishcables.com

Disclaimer: Great effort is made to ensure the accuracy of the information presented, but errors may occur.

Specification and availability should be confirmed with a call to our sales representatives. ©British Cables Company Limited